




Working Height Max.	7.8 m (25'7")
Overall Lift Capacity Max.	230 kg (507 lb)
Overall Width	0.785 m (2'7")
Overall Length	1.86 m (6'1")
Overall Weight	1,540 kg (3,395 lb)

LS0607E

Electric Scissor Lift E-Drive

TOUGH WORLD. TOUGH EQUIPMENT.

LS0607E SPECIFICATIONS >>>

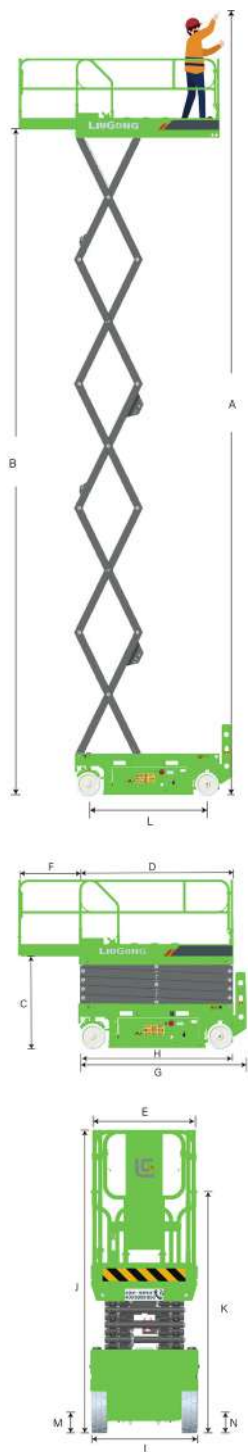

DIMENSIONS

A. Working Height Max.	7.8 m (25'7")
B. Platform Height Max.	5.8 m (19')
C. Platform Height (Stowed)	0.95 m (3'1")
D. Platform Length	1.64 m (5'5")
E. Platform Width	0.75 m (2'6")
F. Extension Deck (Roll Out)	0.9 m (2'11")
G. Overall Length	1.86 m (6'1")
H. Overall Length (Without Ladder)	1.72 m (5'8")
I. Overall Width	0.785 m (2'7")
J. Stowed Height (Rails Up)	2.15 m (7')
K. Stowed Height (Rails Down)	1.72 m (5'8")
L. Wheelbase	1.37 m (4'6")
M. Ground Clearance (Pothole Raised)	85 mm (3")
N. Ground Clearance (Pothole Deployed)	18 mm (0.7")

PRODUCTIVITY

Overall Lift Capacity Max.	230 kg (507 lb)
Extension Deck Capacity	113 kg (249 lb)
Platform Occupancy Max. (Indoor/Outdoor)	2 / 1
Drive Speed (Stowed)	2 km/h (1.24 mph)
Drive Speed (Raised)	0.3 km/h (0.19 mph)
Turning Radius (Inside/Outside)	0.3 / 1.78 m (11" / 5'10")
Lift/Lower Time	25 / 22 s
Gradeability	25 %
Tilt Sensor Activation	X 1.5° / Y 3°
Tire Size (Solid Non-marking)	356 x 114 mm (1'2" x 4")

POWER

Battery	24 V / 225 Ah
Lithium Battery (Optional)	24 V / 173 Ah
Charger	24 V / 30 A
Lift Motor	24 V / 3.3 kW
Drive Motor	24 V / 0.6 kW
Hydraulic System Volume	8 L (2 gal)
Hydraulic Tank Capacity	6 L (1 gal 5pt)

WEIGHT

Overall Weight	1,540 kg (3,395 lb)
----------------	---------------------

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China

T: +86 772 3886124

E: overseas@liugong.com

www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area.

10/2024 Designed by LiuGong